

Petrofoam
For Plastic Production



بتروفوم
للمنتجات البلاستيكية

Polyethylene Sheets

The technical specification of our products conforms to **BRITISH, GERMAN and AMERICAN STANDARDS** (BS 2781, ASTM – E 154) these sheets are successfully used in a wide variety of construction projects, for example: Road works, multi storey building, basement airfield, port farms, etc.

We manufacture heavy duty polyethylene sheeting with a width from 2 meters to 10 meters. The standard width of polyethylene sheeting for dealer network sale is 3.6m(12ft) and for specific project is 4 meters.



Mechanical & physical properties of Gauge polyethylene film 100

Density, gm/cm ³	0.923 - 0.915
MFI of Resin, g/10 min	0.30 - 0.24
Tensile Strength lb/in ²	110
Elongation at break %	520
Uical Softening Point, oc	100
Tear Strength, g/0/001	60
Burst Strength, Kg/cm ²	2.4
Burst Strength, lb/in ²	30
Impact, g	450



POLYETHYLENE SHEETS

Thickness : 22 MICRON TO 500 MICRON
Widht : 20 CM TO 60 MTR
Lenght : Base upon order

"We can make in all colors"

Following are the standard thickness and width of sheets available in rolls.

Open Width	Thickness				
	Meters	Microns	mm	Mill	Gauge
2 to 10	200	0.20	8	800	
2 to 10	250	0.25	10	1000	
2 to 10	300	0.30	12	1200	
2 to 8	400	0.40	16	1600	
2 to 6	500	0.50	20	2000	
2 to 5	750	0.75	30	3000	



"Some special order we can make up to 1000 Mic"



Polyethylene is used for many kinds of weatherproofing and can be a permanent weather barrier on exterior walls. It is used in construction and remodeling projects, especially as a vapor barrier in walls. The film is commonly used to temporarily seal off rooms and to cover building materials. Sheets can be used as a painter's drop cloth or on top of curing concrete to help it retain moisture. Some tarpaulins and tents are made from polyethylene as well.



Shrink Films

We are Shrink Film . Our products are always in top quality. The material which we are using is approved from the specifications and international standards

Description:

Shrink Films

- Thickness : 30 MICRON TO 200 MICRON
- Widht : 200 MM TO 650 MM
- Lenght : 50 METER TO 500 METER

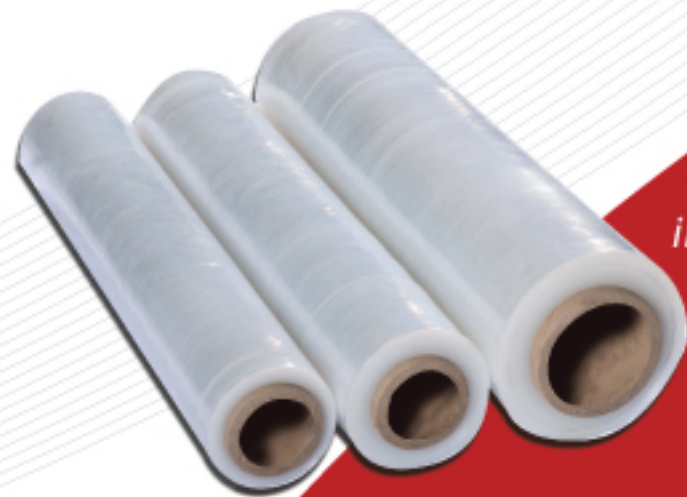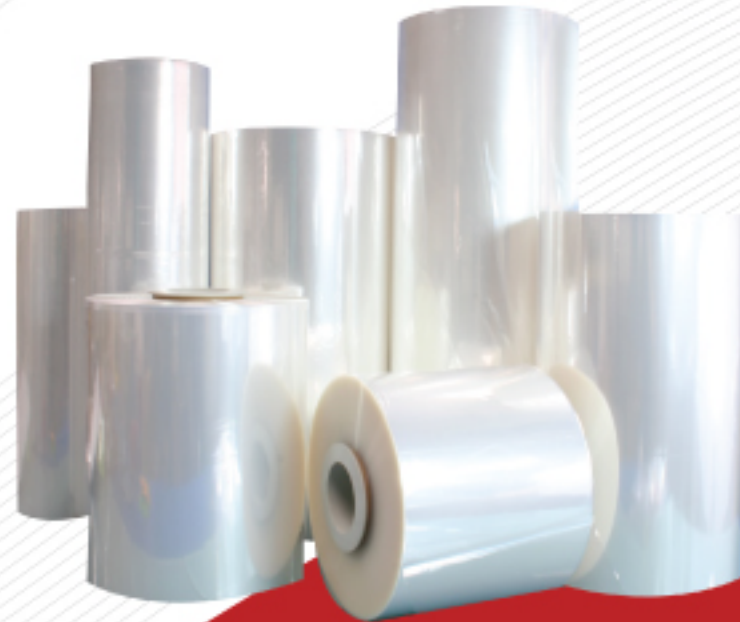

"Engineered new concepts of products in order to meet the rapid technological advancement and market demands"



"Shrink films solutions for a wide range of industries"



Stretch Film

We are producing Stretch Film,. Our products are always in top quality. The material which we are using is approved from the specifications and international standards

Description:

Stretch Films

- Thickness : 16 MICRON TO 35 MICRON
- Widht : 200 MM TO 1000 MM
- Lenght : 50 METER TO 5000 METER



"Engineered new concepts of products in order to meet the rapid technological advancement and market demands"



"Stretch films solutions for a wide range of industries"




Bubble Films

The Air Bubble films we produce is widely used, packaging for electronic goods, instruments, ceramic, hand craft, house items, kitchen goods, furniture and many more areas.

Its impact resistance, shock absorber and non-toxic which we offer come in all standard lengths or we can produce based on our clients requirements.

Description:

- 1.5 meter X 100 yards
- 1.5 meter X 50 yards
- 75 centimeter X 100 yards Or 50 yards

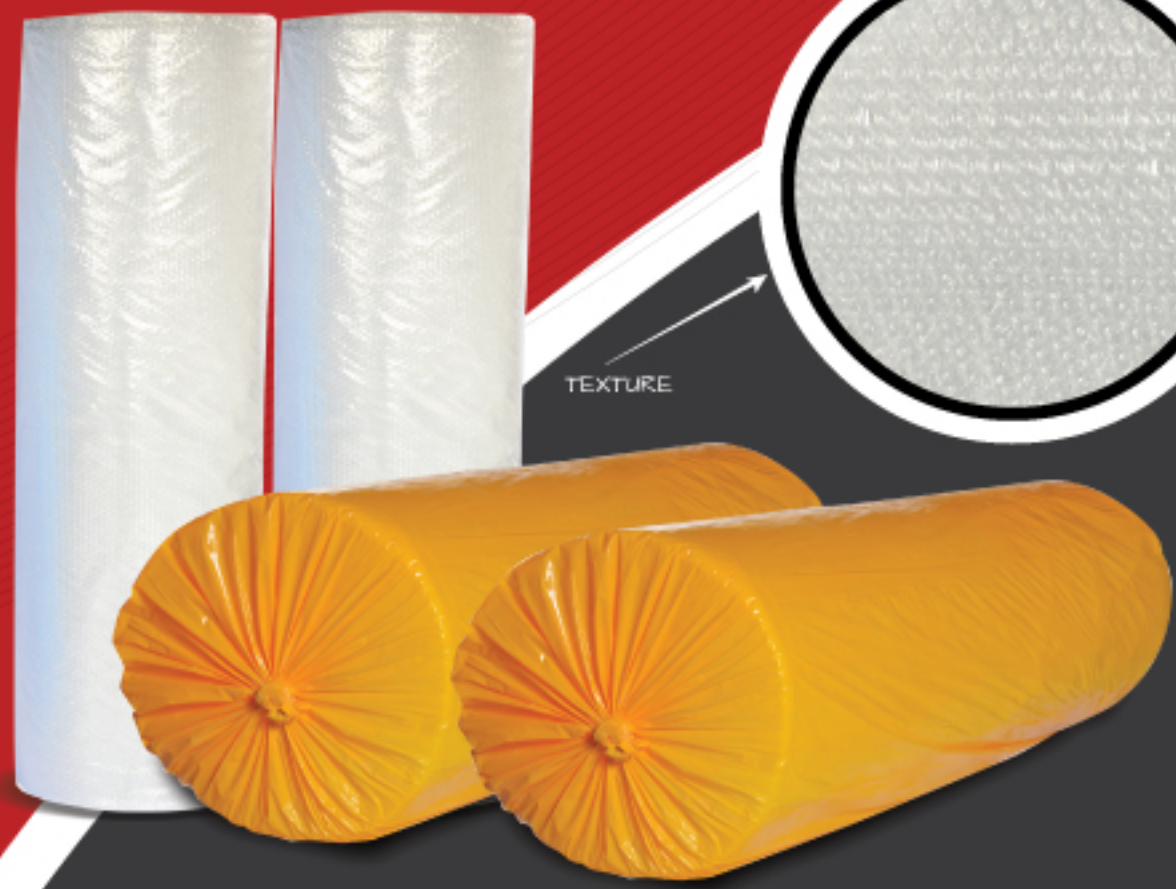

TEXTURE

"Engineered new concepts of products in order to meet the rapid technological advancement and market demands"

Our team of experienced workers allows us to deliver the best of air bubble films depend on our customer requirements.



Warning Tapes

We make marker or caution tapes of quality that its expectancy is estimated to be approximately 20 years of above-ground and underground ducts and cables.

We also make red and white tape with printed messages for highlighting traffic and red road hazards and diversions. Other than red standard underground services such as laying over electrical or telephone cable line, water or gas pipelines, etc.

Caution tapes can be supplied in any colour with any inscription as required by our valued customers. The film used is resistand to acids.

Warning Tapes

"We can do in all colors and sizes"



Thickness : 25 MICRON TO 200 MICRON
Widht : 3 INCHES TO 20 INCHES
Lenght : 150 METER TO 2500 METER

Caution Tapes



Garbage Bags

HIGH DENSITY AND LOW DENSITY POLYETHYLENE, CO. - EXTRUSION

We make garbage/trash bags in high density, low density and Co-Extrusion film with very high strength that is pierce-resistant with optimum tear, burst and impact strength.



"We can do in all colors and sizes"

Shopping Bags

PLAIN PRINTED AND SPECIAL - HANDLED CARRIER BAGS

With the commissioning of new extruders, printing and cutting machines we are offering a very wide and unique of carrier bags. We can supply the bag in LDPE, HDPE, polyethylene or CO-extrusion films with six color printing and a variety of handles.

Our Experienced personnel in our art department is capable of adding colour to any designs to the maximum satisfaction of our customers.



Table Sheet

we are one of the professional manufacturers of plastic table sheet with high quality and many styles of dining table plastic here in Qatar.

You can select the color of your choice and we will do it for you.


LD Clear Bag

LD clear bag is widely used for manufacturing various containers, dispensing bottles, wash bottles, tubing, plastic bags for computer components, and various molded laboratory equipment. Its most common use is in plastic bags.



"We can do it in all color with your own request"

Table Sheet

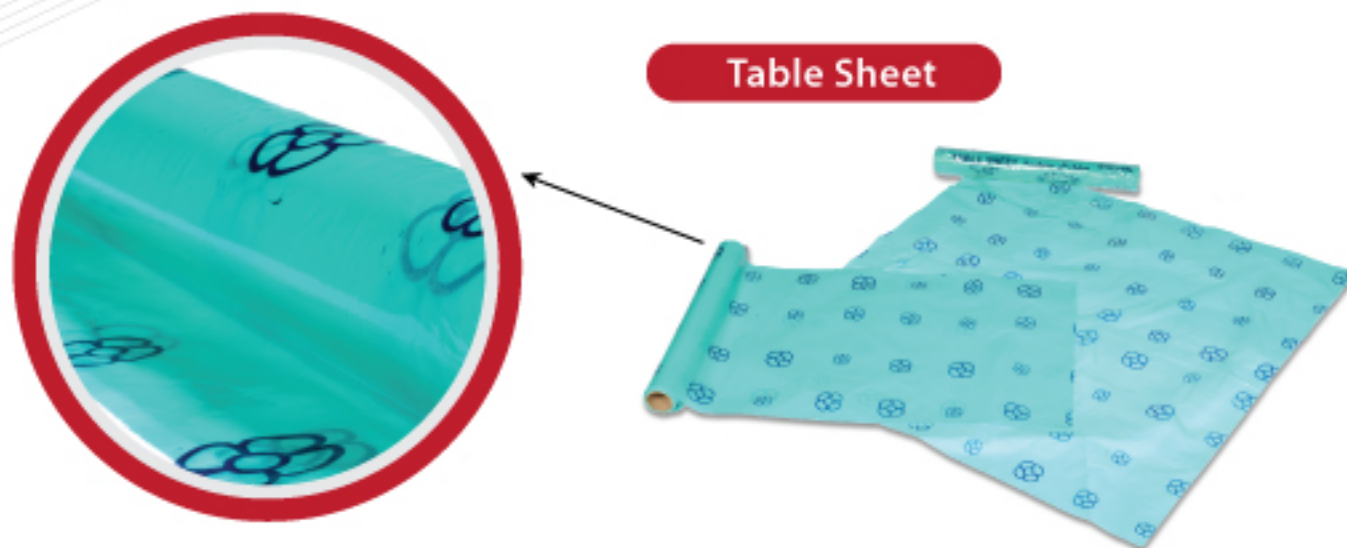

Sleeving

FOR DUCTILE IRON PIPES AND FITTING, WATER AND SEWAGE PIPES.

Petro foam factory polyethylene slaving is manufactured in accordance with BS 6076:1981 and ASTM-1248-78 from prime grade raw polyethylene.

General properties of the sleeving.


- A. Free from tears and void with no pin - holes or other flaws.
- B. The tensile strength of the film in both machine and transverse direction is not less than 13mpa.
- C. Elongation at break in both and transverse direction will not be less than 350%.
- D. Sleeving is anti-corrosive high resistant to most acids, alkalis and subsoil salts and diameters 80mm - 1200 mm in black colors.
- E. Stocks are available in standards roll length of 100m for pipe with diameters 80 mm- 200 mm in blue and black colors.



"We are ISO Certified Company"

Green Mesh


We are ready to provide green mesh in different sizes and different shade percentage.

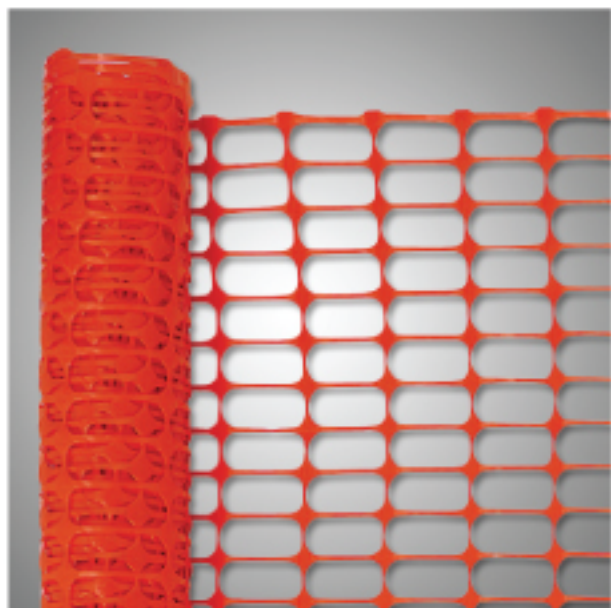

Warning Net

"Engineered new concepts of products in order to meet the rapid technological advancement and market demands"

LOCATION MAP

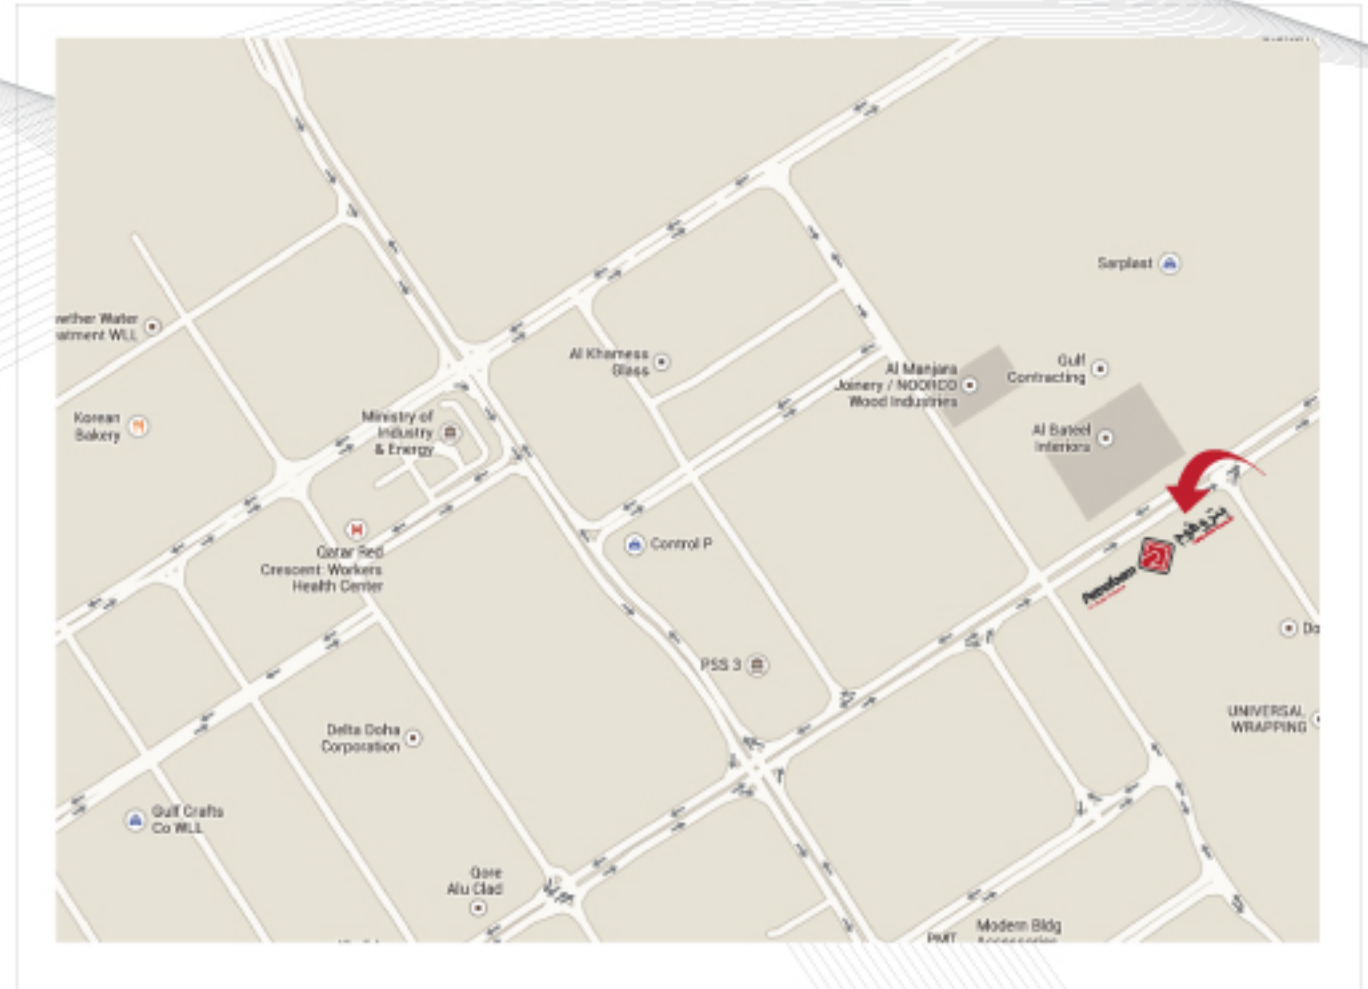

Contact Us

GENERAL MANAGER:
gm@petrofoam.com

ASST. GENERAL MANAGER:
agm@petrofoam.com

FINANCE DEPARTMENT:
accounts@petrofoam.com

SALES EMAIL: sm@petrofoam.com / sales@petrofoam.com

ADMINISTRATION: info@petrofoam.com/admin@petrofoam.com

COMPLAIN/CUSTOMER CARE: customer.care@petrofoam.com

Phone Numbers: 44114632 / 44582831 / 44683382 / 44689247

Phone Number: 44684313

Office Time:

SATURDAY - WEDNESDAY
THURSDAY

8:00AM to 5:00PM
8:00AM to 2:00PM





The history

Petro Foam was established since 1995, it's a limited liability business holding a commercial registration number of 17831 Qatar.

Our company has an ISO-9002 certified dealing in the peninsula state of Qatar. The Civil engineering department and ministry of electricity Doha State of Qatar had approved all the polyethylene sheets and bubble film contrived by Petro Foam are all in best and high quality remarks.

Petro Foam product line conforms to the British, German and American standards. All products are being manufactured in an accurate controlled high standard.

Our mission

- To make difference everywhere we engage to satisfy our customers.

Our goal

- Meet all customers and all their sense of comfort to deal with us.
- Keep abreast of development in the plastic sector.

CHAIRMAN MESSAGE

Petro Foam is pleased to introduce ourselves as the manufacturer of polyethylene rolls, Bags and UPVC pipe.

The polyethylene, UPVC pipes and bags are manufactured in our modern factory under the expert supervision.

Our mission is to be the preferred suppliers on quality rolls at the lowest cost as determined by our customer in our selected market area.

Best Regards

Shiek Mansour Bin Jabor Bin Jassim Al Thani

GENERAL MANAGER MESSAGE

Over the years We at "Petro Foam" factory have successfully create a remarkable reputation for our enterprise by establishing unrivalled quality and reliability in all our materials and services offerings.

Today, as our business grows we were able to grab more than 75% of local market clients and strongly entering the local Qatari market. We remain committed to our philosophy of producing high quality which comply with the highest international standards and maintaining our stand in local and export market.

Finally, I want to thank you Qatar Petro Chemical (QAPCO) for supporting us and all local industries.

Best Regards

Ahmed Naseer Eddine
General Manager

BUSINESS CARD

Petrofoam
For Plastic Production



بتروفوم
للمنتجات البلاستيكية